

Capitol Centre Theatre Technical Specifications

General Manager (705) 474-1944, ext. 224

.pdf version of this page is available for download at <http://www.capitolcentre.org/TechnicalSpecifications.aspx>

There are 932 seats in the Capitol Centre; 666 on the main floor and 266 in the balcony.

Technical Policies

Production technical requirements must be advanced a minimum of 14 days prior to loading into the venue.

Pyrotechnic effects must be approved by the Technical Director a minimum of 21 days prior to the performance, and must be operated by a licensed technician.

Maximum sound pressure level in the House is 96 dB(A) as measured from the FOH mix position. This is based on a 90 dB(A) criterion level with a 3 dB(A) exchange rate. Sound pressure is measured with an SLM (Type 2, SLOW RESPONSE, A-filter).

Dry Ice, Glycerin, or water based fog and haze machines may be used, oil based foggers are not permitted in this venue.


The Stage floor is sprung hardwood covered with Duratex panels painted with a flat black silicon paint. Lagging and screwing into the floor is permitted provided pilot holes are drilled and remaining holes are filled and painted upon load out.

The Stage floor may be painted for a production using latex paint only. The floor must be returned to flat black silicon upon load out.

All set construction and painting must be complete prior to load in.

Any set pieces or staging that will be suspended overhead must have the rigging approved a minimum of 14 days prior to load in.

Theatre Layout (Mezzanine and Stage)

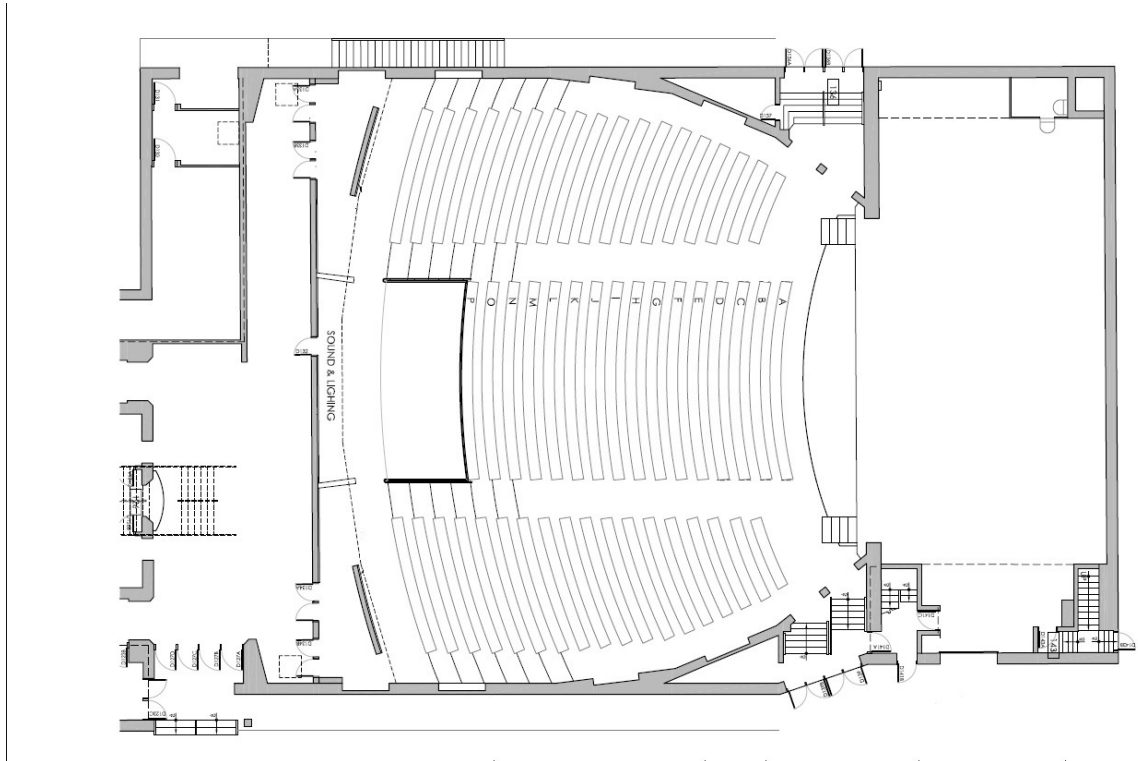

Proscenium Width: 38'10"

Proscenium Height: 23'10"

Stage Depth (from Plaster Line): 30'4"

Apron Depth: 3'6"

SR Wing: 14'6"

SL Wing: 15'2"

Pit Width: 43'2"

Pit Floor is 6'0" below Stage Deck Level

House Floor is 2'8" below Stage Deck Level

FOH Mix and Lighting position are 75' from Stage Plaster Line

Load-in Door is 8' x 8' and is located Stage Left

Stage is level with load in area (no ramp or stairs)

Orchestra pit allows for 18 positions

Please Note:

There is a Pit Covering that is constructed from four (4) removable 4'x8' risers (Black). When the extension covering is in place it should be noted that it is **NOT** a performance area

Soft Goods

Main Valence: 28oz. Red Velour, Flame Treated, 42' x 12'

Main Draw: 28oz. Red Velour, Flame Treated, 42' x 24'

Mid Draw: 22oz. Black Velour, IFP, 42' x 24'

Rear Draw: 24oz. Black Velour, Flame Treated, 42' x 24'

Legs (3 Sets): 22oz. Black Velour, IFP, 12' x 24'

Borders (3 Sets): 22oz. Black Velour, IFP, 40' x 8'

Cyclorama: White Filled Muslin, IFP, 40' x 24'

Scrim: Black Sharkstooth Scrim, IFP, 40' x 24'

Rear Wall is Red Brick

Stage Equipment, Projection and Extras.

6	4' x 8' Riser (Black)	4 sets of 8" and 24" legs 8 sets of 16" legs
2	4' x 8' Carpeted Riser (Grey)	
80	Orchestra Chairs (Burgundy)	
1	18' A-Frame Ladder	
1	12' A-Frame Ladder	
1	6' A-Frame Ladder	

Dance Floor: Black 3Marley dance floor is available, covering the stage from the DS extension to 4' from the US wall, 40' wide. This is at an additional rental cost.

Projector: Barco DP2K 12c Cinema Projector, HDMI feed from FOH booth. Screen on lineset 3, 14'x12' motorized screen hung from the proscenium and the cyclorama on lineset 22 can all be projected upon. Projector is an equipment rental at additional cost.

Spotlights: 2 Lycian M2 Medium 2k Followspots are situated in the projection booth. Spotlights are an equipment rental at additional cost.

Hazer: 1 Radiance Water-based Hazer. Typically lives USR elevated 10'.

Line Set Schedule

Please Note: All measurements are taken from the Plaster Line, NOT from the Stage Apron Lip

Line Set Number	Distance From Plaster Line	Description	Type	Maximum Load	Notes
1	0'6"	Main Valence	Arbor	650 lbs	Cannot be Struck
2	1'6"	Main Draw	Arbor	650 lbs	Cannot be Struck
3	2'7"	Movie Screen	Arbor	650 lbs	Cannot be Struck
4	3'10"	First Electric	Arbor	650 lbs	Cannot be Struck
5	6'1"	First Legs	Bag	300 lbs	No Electrics
6	8'6"	Free	Arbor	650 lbs	
7	9'10"	Free	Bag	300 lbs	No Electrics
8	10'9"	Free	Arbor	650 lbs	
9	12'8"	Free	Arbor	650 lbs	
10	14'0"	Free	Arbor	650 lbs	
11	15'11"	Free	Arbor	650 lbs	
12	17'0"	Mid Draw	Arbor	650 lbs	Cannot be Struck
13	17'5"	Free	Bag	300 lbs	No Electrics
14	19'2"	Free	Arbor	650 lbs	
15	20'0"	Free	Arbor	650 lbs	
16	20'7"	Free	Bag	300 lbs	No Electrics
17	22'3"	Free	Bag	300 lbs	No Electrics
18	22'10"	Free	Arbor	650 lbs	
19	23'5"	Free	Arbor	650 lbs	
20	24'4"	Free	Bag	300 lbs	No Electrics
21	27'0"	Rear Draw	Arbor	650 lbs	Cannot be Struck
22	28'0"	Cyclorama	Bag	300 lbs	No Electrics

Please Note:

- If a line set is designated free, it can be used as a soft good pipe, or a scenery fly pipe. Arbor lines designated as free may be used as electrics.
- The load on line sets with a "Cannot be Struck" CANNOT be removed.
- Bag Type line sets cannot be used as Electrics pipes
- Line Set #3 Cinema Screen is 18'x36' with a rigid frame
- There are 10 six-circuit drop boxes located on stage for use on the line sets (5 on SL, 5 on SR)

Lighting Inventory

Control(Main)

ETC GIO 2048

ETC 2x20 Universal Fader Wing

Control(Backup)

ETC ION 2048

ETC 2x20 Universal Fader Wing

Dimming

2 Strand CD-80 Towers (192 Total Circuits, 2.4kW load per circuit)

Dimmers have been upgraded to DMX 512 protocol with Johnson Systems CD-2000 processors

Distribution

60 FOH Circuits

84 On Stage Circuits (24 on First Electric, 60 on Drop Boxes- 30 SR, 30SL)

All circuits are 20 Amp Twistlock.

Adapter Cables are available in limited quantities.

Instruments

Number	Type	Description	Zoom/Deg	Bulb	Note
2	Strand Iris 3	3 Cell Wash		1kW FFT	Worklight
6	Strand Cantata	ERS Zoom	18-32	1kW FEL	FOH Only
12	ETC Source 4 Lustr	LED Profile	26	LED	Series 2
18	ETC Source 4 Zoom	ERS Zoom	15-30	750W HPL	FOH Only
36	ETC Source 4 Profile	ERS Profile	See Below	750W HPL	
24	ETC Source 4 PAR	PAR		750W HPL	
15	ETC Selador Vivid-R	LED Wash	30/40	LED	2-Cell
18	Strand Fresnelite	Fresnel		1kW BTR	
7	ETC Source 4 Multipar	PAR		750W HPL	4 Cell
2	Lycian M2 Medium	Follow Spot		HMI 2kW	
6	Martin MAC 350	Moving Head		LED	
6	Martin MAC 101	Moving Wash		LED	
6	Martin MAC Quantum	Moving Head		LED	
6	Martin MAC Aura	Moving Wash		LED	

ETC Source 4 Profile Barrels

Number	6	18	18	12
Type	19 Degree Barrel	26 Degree Barrel	36 Degree Barrel	50 Degree Barrel

Audio Inventory

FOH	Stage
L/R Mains	Consoles and Outboard
4 x Meyer MSL-4	Midas Sienna 400
2 x Meyer 650P with Driver Upgrades	Presonus ACP88
	TC Electronic M-OneXL
Centre Infill	
2 x Meyer UPA-1	Yamaha M7cl48
Meyer M1	MBM7cl MeterBridge
Ashley Mosfet2000	MYADDA96 I/O (8x8)
	PW800 PSU
Console	ART SyncGen Clock
Avid SC48 w/Avid 16IO	
	8 Mixes Onstage
System Processing	4 x DBX 1231
2 x Lake LM26	4 x QSC RMX2450HD
	12 x JBL SRX 712m
FOH Outboard	
Numark CDN25	2 Rolling Mixes w/Subs
2 x Yamaha MPS5	DBX 2231
ART MPA II	Ashley Protea 113.24cl
Edirol UA25	2 x QSC RMX2450HD
Furman F1000UPS	2 x Diac B118FL
Toshiba PC Windows 7 OS	
Samsung Laser Printer	

Microphone Cabinets

Number	Type	Note
8	Shure SM58	
5	Shure SM57	
3	Shure B57	
1	Shure SM7b	
5	Shure B181C	
2	Shure SM81	
2	Shure SM91	
1	Shure SM55s	
2	Sennheiser e906	
1	Sennheiser e902	
2	Sennheiser MD421	
6	AKG C518m	
2	Oktava MK012 Kit	
2	Crown PCC160	
1	Countryman IsomaxIV	
3	Studio Projects B1	
1	Studio Projects LSD2	
2	Radial J48	
6	Yorkville YD11	
1	Yorkville YD12	
Wireless		
1	Sennheiser EW112 Guitar Kit	Extra Cost Rental
5	Sennheiser 145 G3	Extra Cost Rental
3	Sennheiser 152 G3	Extra Cost Rental
3	Countryman E6i	Extra Cost Rental

Audio Miscellaneous

Ample XLR Cabling

Mic Stands are K+M

Mic Claws are LP

3 x 16 Channel SubSnake

150' 6 Channel SubSnake

40 Channel Split DSL to FOH

16 returns to DSL and DSR

8 PA Returns to stacks/array, 4 Per side SL and SR Orchestra Pit

8 15amp Isolated U-Ground circuits onstage and in pit

8 Monitor NL4 circuits around stage perimeter

Power Disconnects

All power disconnects are located Stage Left

60A Stove Plug

100A 3Ø Audio Isolated Ground, CamLok

400A 3Ø Lighting, CamLok

100A 3Ø Theatrical SD-124A Distro CamLok to U-Ground

Paging/Program Sound

Program Sound and paging to all dressing rooms and green room.

Program sound to lobby and Williams 72.9 Mhz hearing assist system

Stage Communication

SL ClearCom Base Station at Stage Managers Rolling Desk

ClearCom Stations at FOH LX, FOH Audio, FOH Spotlight, DSR, USR, DSL, USL

8 ClearCom Packs and HeadSets

All ClearCom is wired.

Additional Production Equipment

The **WKP Kennedy Gallery** is equipped with a DB Technologies IG4T/S15H PA, and a Behringer X32 Console, suited to small format performances in the Gallery.

2 x Yorkville NX25 Powered Speakers with stands can be utilized throughout the building.

There is an installed AV presentation/reinforcement audio system available in the **RBC Galaxy Circle Lounge**, as well as an Epson HC 3500 projector and 8' by 8' screen. Projector inputs are HDMI, Thunderbolt and SVGA.

A portable dance floor is available in the **RBC Galaxy Circle Lounge** which may be installed in other spaces throughout the building.

Hospitality

Dressing Rooms are split between under the stage and above the stage.

Understage dressing rooms include one Principal and one Chorus dressing room with a separate washroom and shower.

Overstage dressing rooms include a Green Room and 2 Chorus dressing rooms. Dressing rooms have enclosed showers and washrooms.

Washer, Dryer, Steamer, Ironing Board, clothing racks and Iron are available.

Keurig Coffee maker at FOH audio mix position.

Bulletin boards are provided for dressing room signage, directions etc.